


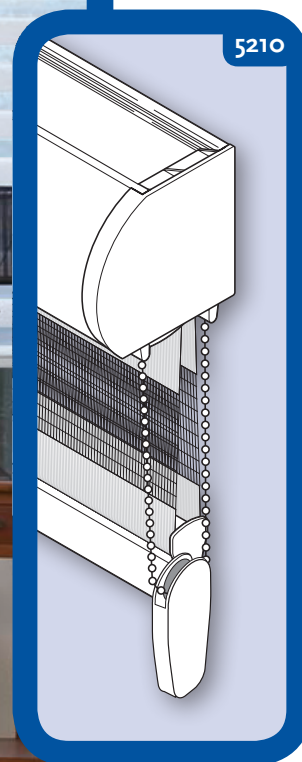

The smart Sunstrip blind for variable shading.

Options

Control side

5100	Control-right
5101	Control-left

Control system

5210	Chain
****	Mono electric
	For all options see page 143

Fixation

5317	Universal bracket with Spacer 15 mm
5318	Extension bracket 15-65 mm

Others


5948	Blackout bottom rail
5950	Anodized profile
5951	Cream profile
5952	Brown profile
5953	Black profile
5955	Side by Side
5960	Metal chain
5971	Same start on back side

Properties

Tube	Ø 38 x 1 mm aluminium tube
Chain	White plastic balls 6 x 4.5 mm
Control unit	Chain and spring operated control unit and tube bearing
Bottom rail	Aluminium white painted 20 x 44 mm include end caps
Cassette	Aluminium white painted Height 70 mm x width 84 mm include bracket
Installation bracket	Universal plastic brackets
Chain weight	Plastic white


Sundries

Chain length	Standard 2/3 of the height Special length on request
--------------	---

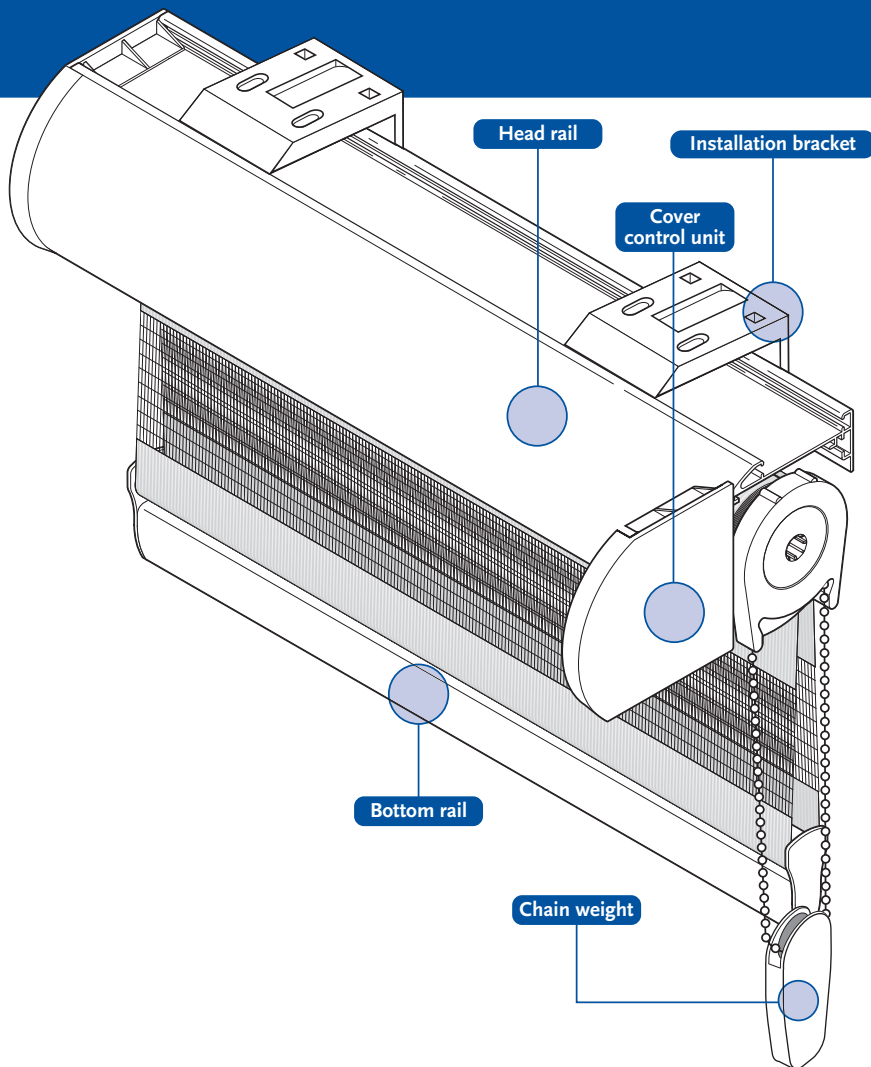


Standard Topics

Cassette

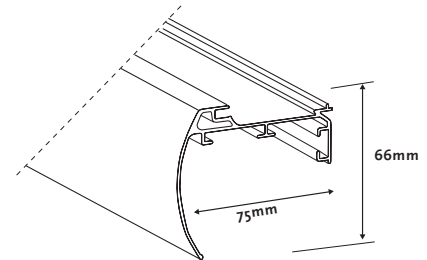


Bottom rail*

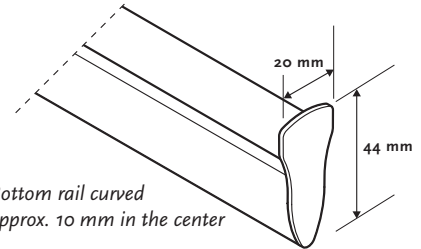

*Bottom rail curved approx. 10 mm in the center


Tube

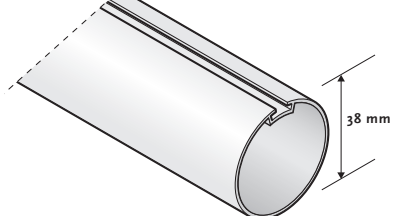

Control sides


5100

5101

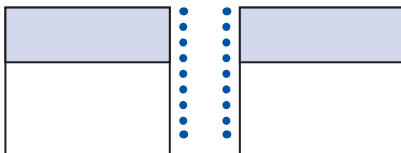


Fixation options

5317




5318



Others


5960

5948

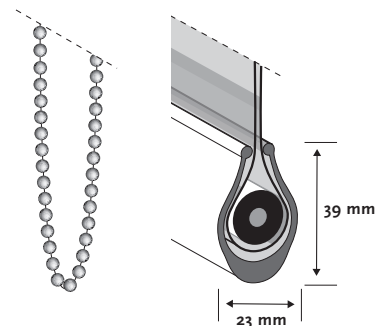

Size restrictions

Size Ind.	Sizes in mm min.	Sizes in mm min.	Remarks
A	300	2750	Chain ¹⁾
	400	2750	Electric ¹⁾
A'	8		
A²	19		
B	500	3200	Fabric 0.35 mm thickness
	500	2400	Fabric 0.45 mm thickness
	500	2200	Fabric 0.60 mm thickness
	500	1800	Fabric 0.70 mm thickness
C	75		
D	A -/- 27		

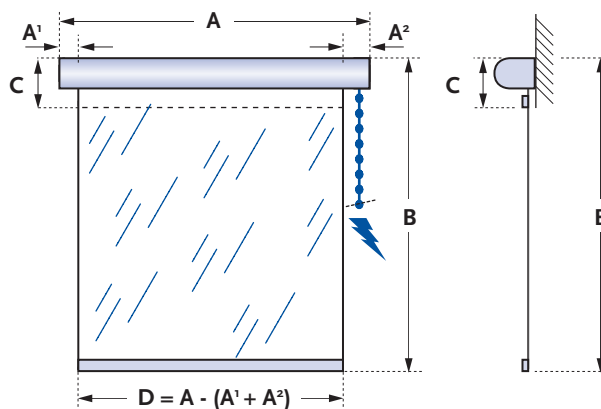

¹⁾ Depending on the width of the fabric