

Options

Control side	7100	Right
	7101	Left
Control system	7200	Lifting cord

Fixation 7300 Universal brackets


Others 7955 Side by side

Properties

Head Rail	Aluminium rail 22.5 x 14.2 mm, color coordinated
Mid Rail	Aluminium rail 23.5 x 14.5 mm, color coordinated
Bottom Rail	Aluminium rail 22.2 x 11.7 mm, color coordinated
Cord	Polyester 0.9 mm / 2.0 mm color coordinated
Universal Brackets	Metal brackets for wall and ceiling
Fabric width	Plisse 20 mm or Duette 25 mm


Sundries

Cord length	Standard 2/3 of the height special length on request with plastic connection and transparent tassel
Angle	Maximum 50°

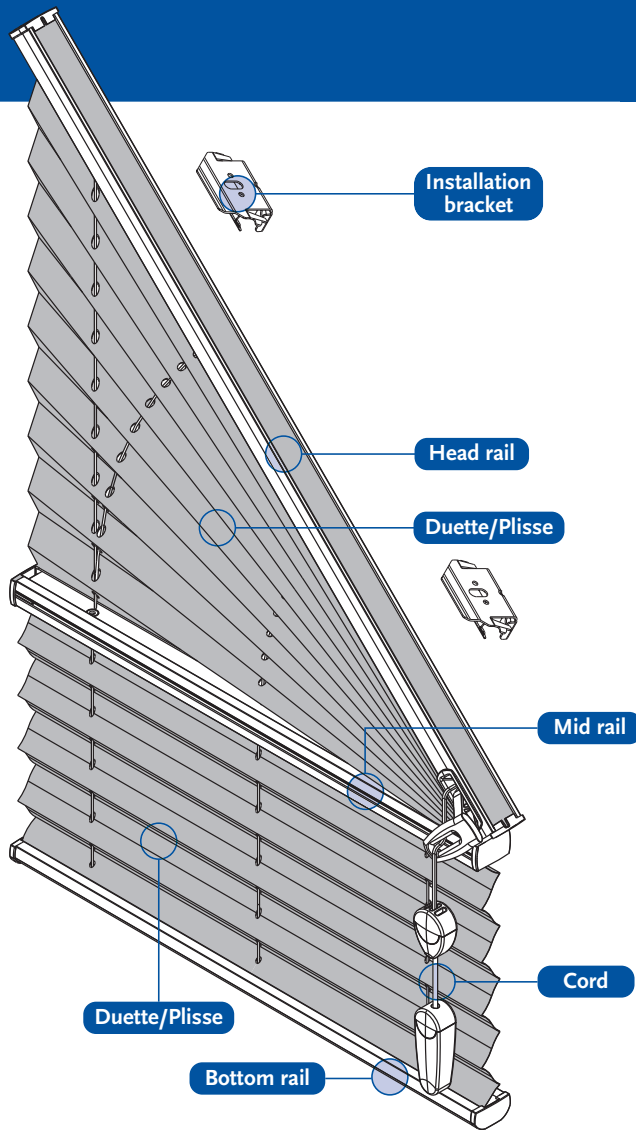


Standard Topics


Head rail

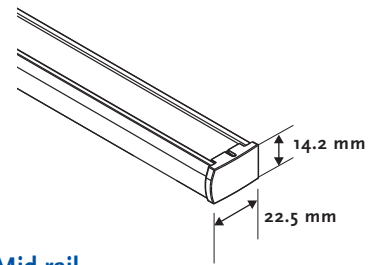

Mid rail

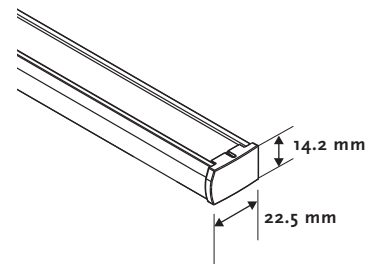


Bottom rail

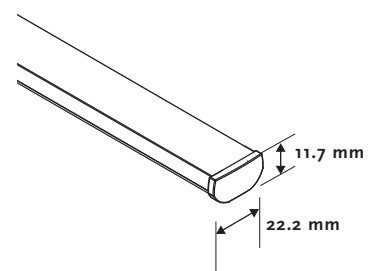


Control sides

7100




7101



Fixation

7300



Size restrictions

Fabric type	Sizes in cm		Area (sqm)	Max. angle
	Width	Height		
Duette 25	min.	40	4.6	50°
	max.	230		
Plisse 20	min.	40	4.6	50°
	max.	200-230*		

* According the fabric width

Stacking height

A	Stacking height (sizes in mm)			
	B (Duette 25 mm)		B (Plisse 20 mm)	
	Daylight	Blackout	Daylight	Blackout
500	55	55	55	60
1000	65	75	60	65
1500	75	95	65	75
2000	95	115	75	80
2500	105	125	80	85

