

Options


Control side	7100	Right	Fixation	7300	Universal brackets
	7101	Left			
Control system	7200	Lifting cord	Others	7955	Side by side

Properties

Head Rail	Aluminium rail 22.5 x 14.2 mm, color coordinated
Bottom Rail	Aluminium rail 22.2 x 11.7 mm, color coordinated
Cord	Polyester 0.9 mm / 2.0 mm color coordinated
Universal Brackets	Metal brackets for wall and ceiling
Fabric width	Plisse 20 mm or Duette 25 mm


Sundries

Cord length	Standard 2/3 of the height special length on request with plastic connection and transparent tassel
Angle	Maximum 60°

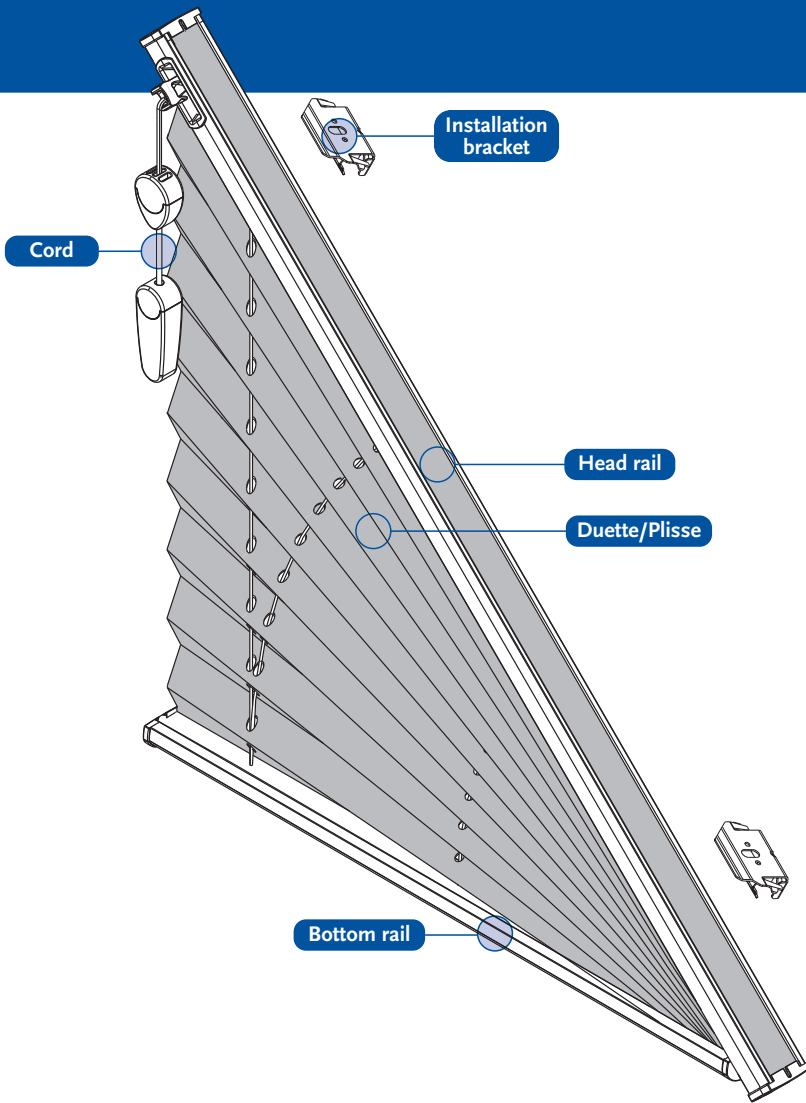


Standard Topics

Head rail

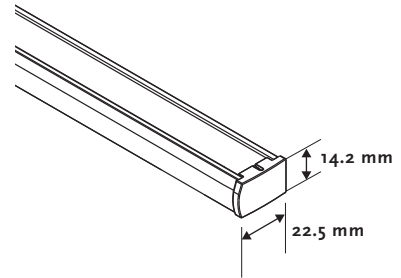


Bottom rail

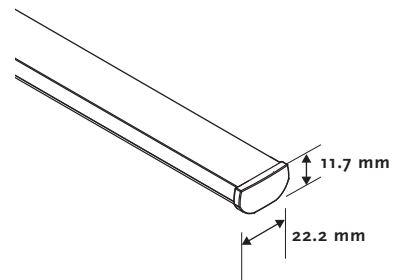


Control sides

7100




7101



Fixation

7300



Size restrictions

Fabric type	Sizes in cm		Area (sqm)	Max. angle
	Width	Height		
Duette 25	min.	40	4.6	60°
	max.	230		
Plisse 20	min.	40	4.6	60°
	max.	200-230*		

* According the fabric width

Stacking height

A	Stacking height (sizes in mm)			
	B (Duette 25 mm)		B (Plisse 20 mm)	
	Daylight	Blackout	Daylight	Blackout
500	40	40	40	45
1000	50	60	45	50
1500	60	80	50	60
2000	80	100	60	65

