

Strong 38 mm chain control with cassette to protect rolled fabric for specially secure installation fixings.

**Options**


Control side	5100	Control-right	Fixation	5310	Universal brackets
	5101	Control-left		5318	Extension bracket 15-65 mm
Control system	5210	Chain	Others	5690	Digital print
	****	Mono electric		5940	Inserted bottom rail (3 colors)
				5950	Anodized profile
				5951	Cream profile
				5952	Brown profile
				5953	Black profile
				5960	Metal chain
				1998	Project

**Properties**

Tube	Ø38 x 1.0 mm Aluminium tube
Chain	White Plastic balls 6 x 4.5 mm
Control unit	Chain operated control unit and tube bearing
Bottom rail	C-Type Steel painted white 19.5 x 10x0.5 mm
Cassette	Aluminium white painted 84 mm width x 70 mm height include brackets
Installation bracket	Universal plastic bracket
Chain weight	Plastic white
Insert bottom rail (option)	Aluminium painted white/cream/grey; 21 x 11.5 mm
Chain tensioner	Transparent child safty tensioner


**Sundries**

Chain length	Standard 2/3 of the height Special length on request
Chain	Has 2 stoppers for height adjustment
Tube	Covered by single thickness of fabric

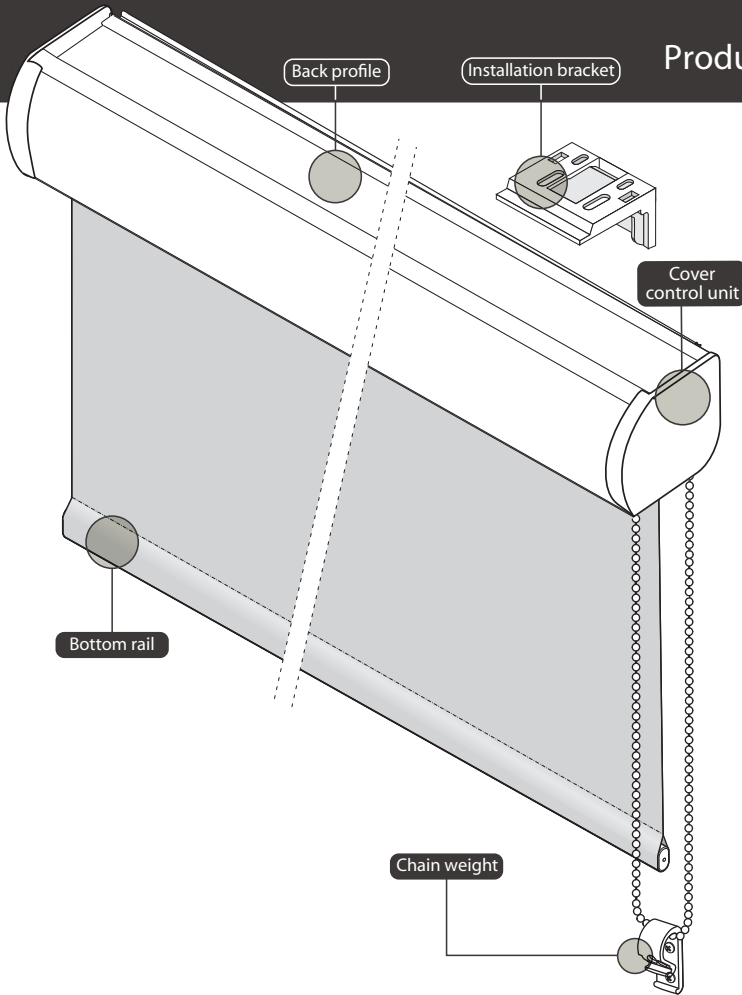


## Standard Topics


### Cassette

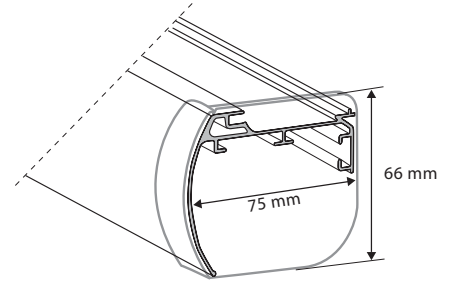


### Bottom rail

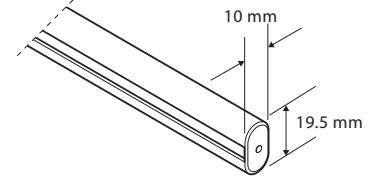


### Tube

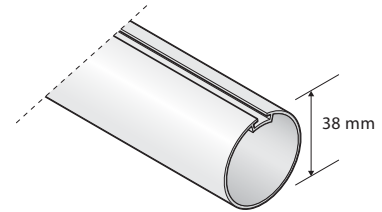


## Control sides

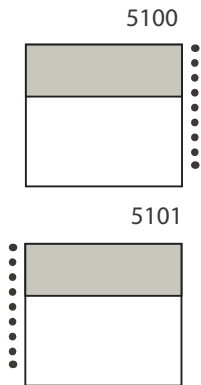

## Fixation options

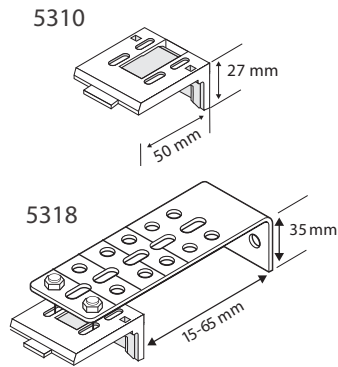

## Others

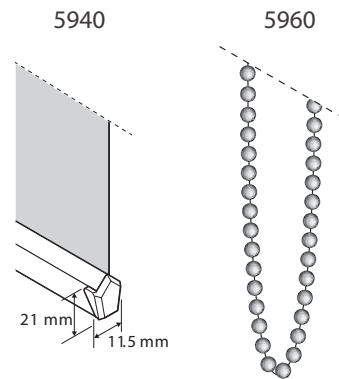

## Size restrictions

Size Ind.	Sizes in mm		Remarks
	min.	max	
A	300	2500	Daylight/Blackout Screen up to 600 gr.
A <sup>1</sup>	16.5		
A <sup>2</sup>	19.5		
B	300	3000	Daylight/Blackout
		2600	Screen up to 480 gr.
		2000	Screen up to 600 gr.
C	91		
D	A -/- 27		
AxB (sqm)	0.09	7.5	Daylight/Blackout
		4.6	Screen up to 480 gr.
		4	Screen up to 600 gr.

